


Imperial [IP] Dimensions Metric (SI) In Parentheses

SPECIFICATION SHEET

Model DR_C Radial Discharge Supply Diffuser Perforated Face, Round Neck, T-bar Mount

CARNES COMPANY 448 S. Main St., P. O. Box 930040, Verona, WI 53593-0040 Phone: (608)845-6411 Fax: (608)845-6504 www.carnes.com

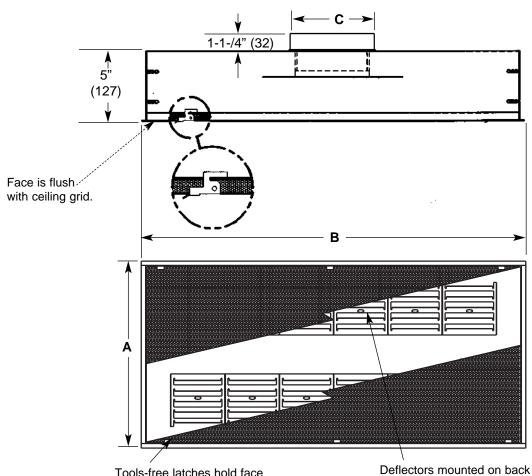

Tools-free latches hold face assembly to ceiling plate assembly.

Deflectors mounted on back of perforated face. Deflectors are field adjustable to different discharge angles.


Notes:

- 1. Standard finish is electrocoat acrylic baked enamel.
- Standard color is #11 Bright White for steel and aluminum. Standard finish is #25 satin polish for stainless steel.
- 3. Inlet is undersized by 1/8" (3) to fit inside duct.
- 4. Available in

Steel DRSC Aluminum DRAC Stainless Steel DRTC

- 5. Ceiling plate is 22 gauge.
- 6. Metric dimensions are given in millimeters.
- 7. Two safety chains are provided as standard feature.
- 8. Seismic tabs are integral to the construction at each corner.
- Deflectors are field adjustable between 180° and 90° discharge pattern, as well as between long (standard) and short discharge pattern.
- 10. Face assembly and baffle assembly are removable for cleaning. They remove as two pieces as standard.





Free	area	is	approximately	51%
1166	ai ca	13	appioximatery	J I /0

Nominal	Dim C
Neck Size	
8" (203)	7-7/8" (200)
10" (254)	9-7/8" (251)
12" (305)	11-7/8" (302)

Nominal		
Face Size	Dim. A.	Dim B.
24" x 24"	23-3/4" (603)	23-3/4" (603)
24" x 48"	23-3/4" (603)	47-3/4" (1213)

COPYRIGHT © 2013 CARNES COMPANY	CLIDEDCEDEC 10650 D
ALL RIGHTS RESERVED	SUPERSEDES 12650-B