
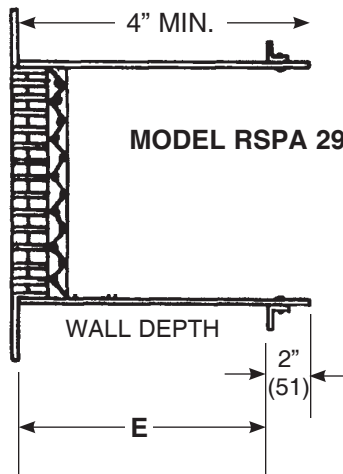



Imperial [IP] Dimensions
Metric (SI) in Parentheses

CARNES COMPANY 448 S. Main St., P. O. Box 930040, Verona, WI 53593-0040 Phone: (608)845-6411 Fax: (608)845-6504 www.carnes.com

SECURITY PRODUCTS

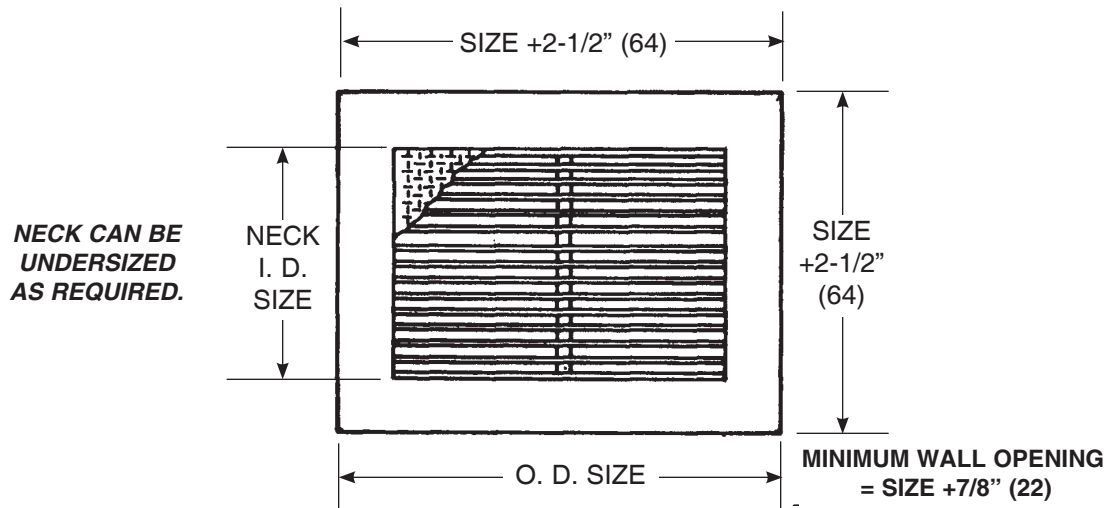

VOLUME DAMPER

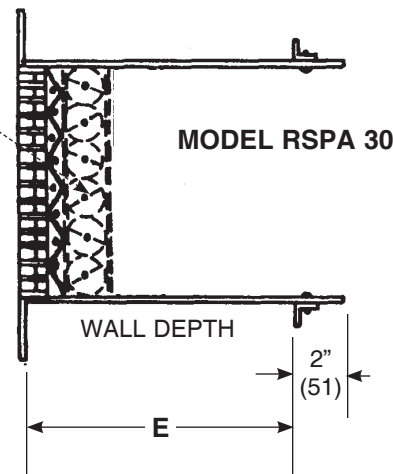

STANDARDS:

- Frame and Sleeves:** 14 gauge cold rolled steel construction.
- Louvered Bars:** .125 (3) x 1/2" (51) cold rolled steel welded at each end and each intermediate support.
- Wire Mesh:** 10 gauge .135 (3) x #2 mesh.
- Support Bars:** 1/4" (6) square. welded at 6" O.C. max.
- Mounting Screws:** Tamper-proof spanner head screws.
- Angles:** Furnished without mounting holes, for field welding to sleeve.
- Damper:** Balancing opposed blade damper, adjustable for volume of air front operated.
- Finish:** White Prime Coat.

OPTIONS:

- Angles 1" x 1" x 1/8" (25 x 25 x 3) hot rolled steel with mounting holes for 1/5" (6) security bolts at 6" (152) O. C. max. Angles furnished loose for field mounting.
- Louvered bars may be placed at 30° angle.
- Aluminum construction available upon request. Please contact factory.
- Mounting holes in face with tamper-proof screws provided.