


Imperial [IP] Dimensions
Metric (SI) in Parentheses

Air Specialties Express, 448 S. Main St., P. O. Box 930040, Verona, WI 53593-0040 Phone: (877)945-9175 Fax: (608)845-6504 www.airspecialties.com

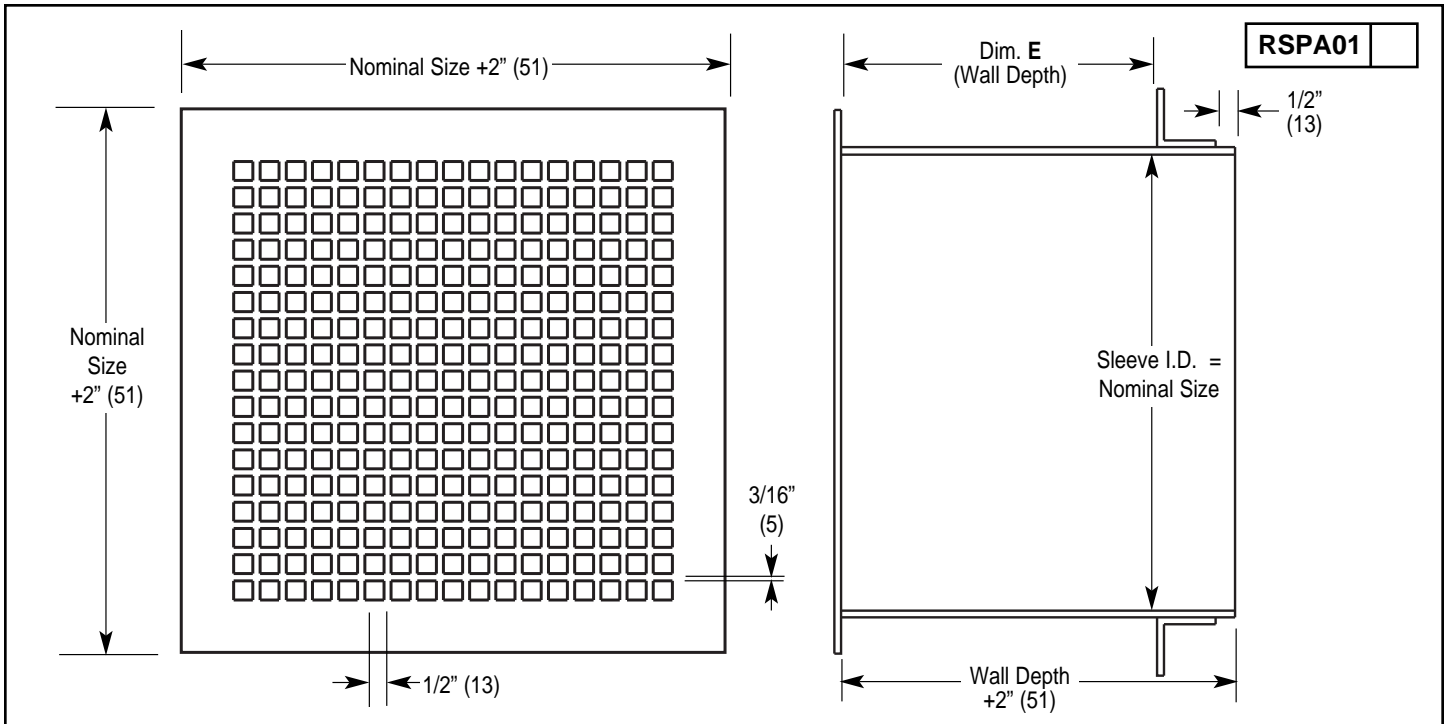

RSPA02

Model Notes:

1. Opposed Blade damper is electrogalvanized steel construction.
2. Damper is operated via flat-blade screwdriver through the face as standard.

RSPA03

Model Notes:

1. Fire damper is dynamic wall-mount style as standard.
2. The fire damper is UL555 classified with 1-1/2 hour rating.

RSPA04

Model Notes:

1. Opposed blade damper is electrogalvanized steel construction.
2. Opposed blade damper is operated via flat-blade screwdriver through the face as standard.
3. Fire damper is dynamic wall mount style as standard.
4. The fire damper is UL555 classified with 1-1/2 hour rating.

Overall Notes:

1. Face is 12 gauge hot rolled steel, with 1/2" (13) square holes and 3/16" (5) frets.
2. Sleeve is constructed of 12 gauge hot rolled steel.
3. Wall Angles are 1-1/2" x 1-1/2" x 1/8" (38 x 38 x 3) hot rolled steel. They are shipped in 4 pieces for field welding.
4. Metric dimensions are given in millimeters.
5. Standard finish is electrocoat acrylic baked enamel.
6. Standard color is #11 Bright White.
7. Recommended Minimum Wall Opening size is Listed Size Plus 3/4" (19).
8. Model RSPA01, size 12" x 12" (305 x 305) with an 8" (203) wall depth, is shown above.