


**Application**


Use with Models SSEA, SSAA and SSMA for fine balancing of flow, complementing major balancing by damper further upstream. The opposed blade design distributes the air evenly over the diffuser and eliminates the need for equalizing grids.

**Standard Features**

- Blades are gang-operated for quick adjustment.
- Adjustment is via flat-blade screwdriver from below the face of the diffuser.
- It attaches to the core, which then snaps into the form for easy installation.
- Construction is steel.
- Standard finish is electrocoat acrylic baked enamel.
- Standard color is #11 white.

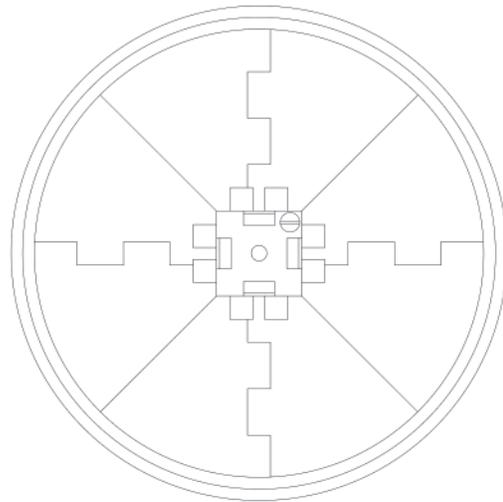

KXRC Dimensions (Inches)				
Size	A	B	C	D
6	5-7/8	1-1/4	3-1/2	4-3/4
8	7-7/8	1-1/4	3-1/2	5-1/4
10	9-7/8	1-1/4	3-1/2	6
12	11-7/8	2-1/8	3-7/8	6-5/8
14	13-7/8	2-1/8	3-7/8	7-1/8
16	15-7/8	2-1/8	3-7/8	8-7/8
18	17-7/8	2-1/8	3-7/8	9-3/8
20	19-7/8	2-1/8	3-7/8	9-7/8

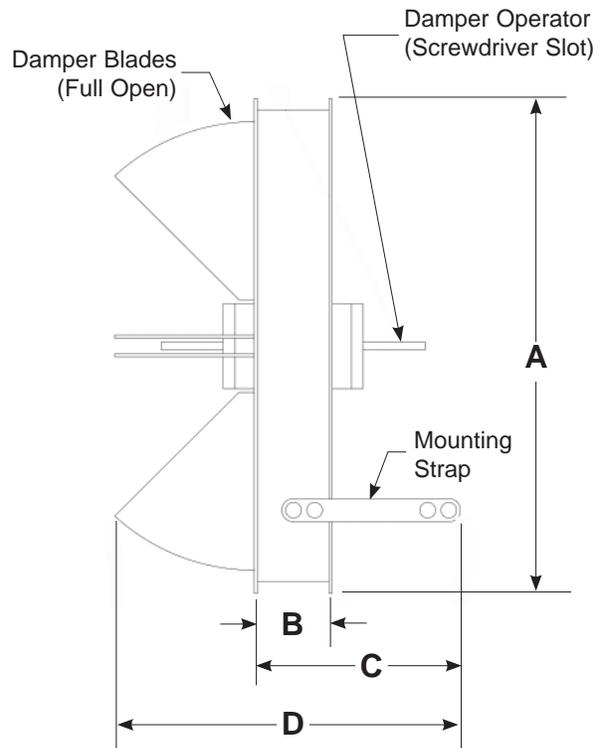

**Model Numbering System**

