


LXMB5
(Exhaust)

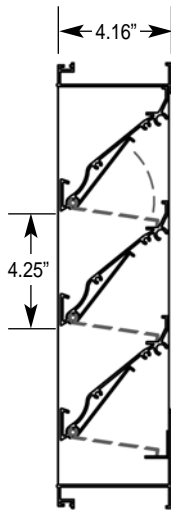

LXMB6 (Supply)

Model LXMB5 and LXMB6

Standard Specifications

Frame: .081 extruded aluminum, 4-1/8" deep

Fixed Blades: .081 extruded aluminum positioned on a 39° angle on approximately 4.25" centers



Damper Blade: .060 extruded aluminum (blades move independent of each other)

Finish: mill aluminum (standard)

Birdscreen: 3/4" x .051" flattened aluminum in removable frame. Screen is mounted as standard on inside (rear) as looking from exterior of building.

Optional Finishes

- Clear Anodize
- Dark Bronze
- Baked Enamel
- Kynar
- Prime Coat

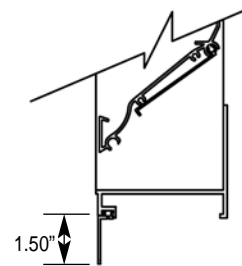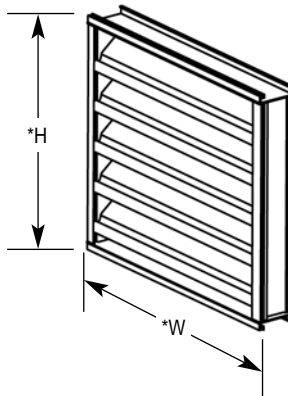

Flange Detail



*Width and Height dimensions are approximately 1/4" under listed size.

Tag	Qty.	Fan Model/Size	Accessory Model/Size	Options/Notes

Project
Arch./Engr.
Representative

Location
Contractor
Date

Model LXMB5 and LXMB6

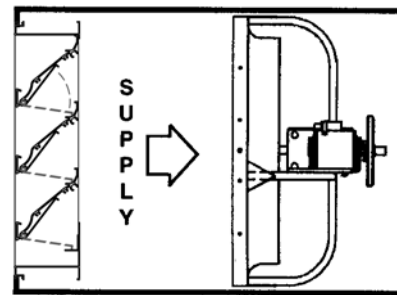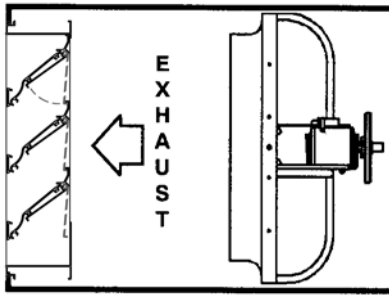

Fan Size	Louver/Damper Size	Flange Width
LY/LZ 09, 10, 11, 12	13-1/4" sq.	1.5"
LY/LZ 13, 15, 16	17-1/4" sq.	1.5"
LY/LZ 17, 18, 19, 20, 21	21-1/4" sq.	1.5"
LW/LM/LR/LN 20	22-1/2" sq.	1.5"
LW/LM/LR/LN 24	26-1/2" sq.	1.5"
LW/LM/LR/LN 30	32-1/2" sq.	1.5"
LW/LM/LR/LN 36	38-1/2" sq.	1.5"
LW/LM/LR/LN 42	44-1/2" sq.	1.5"
LW/LM/LR/LN 48	50-1/2" sq.	1.5"
LW/LM/LR/LN 54	56-1/2" sq.	1.5"
LW/LM/LR/LN 60	62-1/2" sq.	1.5"